



## Four Conductor Solderless Lug

### TYPE: P4LIB-4N/PP4LIB-4N

- Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- Electro-Tin plated to provide very low contact resistance and inhibit corrosion
- Suitable for use with either copper or aluminum conductors
- Rated for 600 Volts
- Chamfered wire entry provides ease of installation
- UL Listed to 90° C

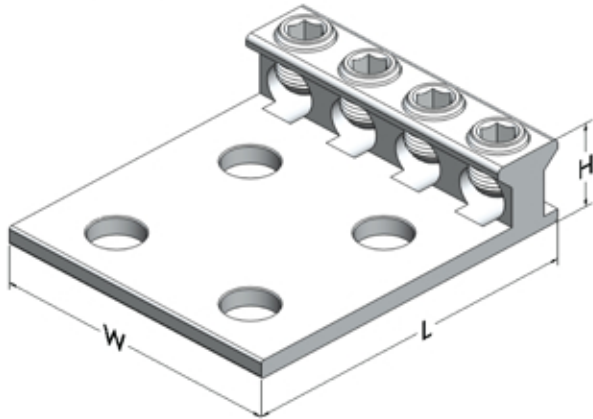

**Figure 1**

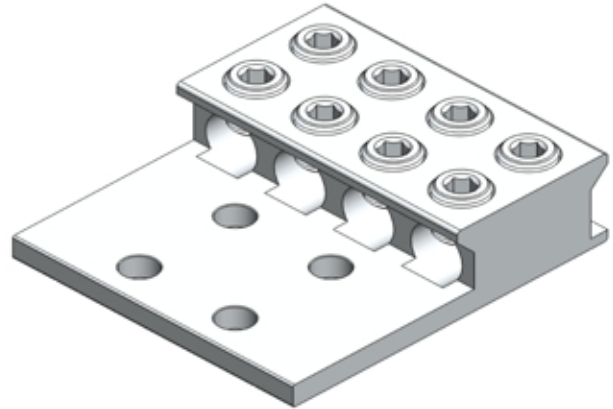

**Figure 2**

Catalog Number	Fig. No.	Wire Range AWG	Wire Range MM	Stud Size	Dimensions, Inches			Hex Size
					H	W	L	
P4LIB250-4N	1	250 - 6	120 - 16	1/2	1.02	3.30	3.88	5/16
P4LIB350-4N	1	350 - 6	185 - 16	1/2	1.13	3.92	4.25	5/16
P4LIB500-4N	1	500 - 4	240 - 25	1/2	1.41	4.63	4.65	3/8
P4LIB600-4N	1	600 - 2	300 - 35	1/2	1.51	5.18	4.65	3/8
P4LIB800-4N	1	800 - 300	400 - 150	1/2	1.69	5.38	4.94	1/2
P4LIB1000-4N	1	1000 - 350	500 - 185	1/2	1.88	6.19	4.94	9/16
PP4LIB600-4N	2	600 - 2	300 35	1/2	1.51	5.18	5.75	3/8
PP4LIB800-4N	2	800 - 300	400 - 150	1/2	1.69	5.38	5.75	1/2
PP4LIB1000-4N	2	1000 - 350	500 - 185	1/2	1.88	6.19	6.18	9/16

\* "N" designates NEMA standard stud holes.

\* Oxide Inhibitor is recommended for all aluminum terminations.