


Aluminum Neutral Bars

TYPE: PNB

- Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- Electro-Tin plated to provide very low contact resistance and inhibit corrosion
- Suitable for use with either copper or aluminum conductors
- Rated for 600 Volts
- Chamfered wire entry provides ease of installation

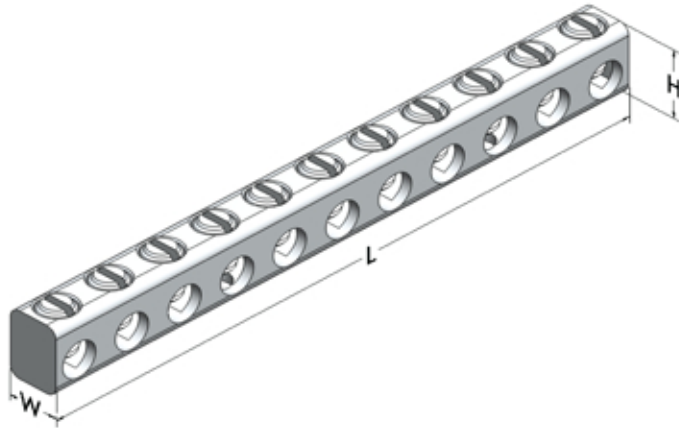

Catalog Number	Cond. Range	Number of Ports	Total Number of Holes	Mounting Hole Position*	Dimensions, Inches		
					H	W	L
PNB4-2	4 - 14	2	3	2	0.44	0.31	0.98
PNB4-4	4 - 14	4	5	3	0.44	0.31	1.57
PNB4-6	4 - 14	6	7	4	0.44	0.31	2.25
PNB4-9	4 - 14	9	11	1 & 11	0.44	0.31	3.50
PNB4-12	4 - 14	12	14	1 & 14	0.44	0.31	4.43
PNB4-15	4 - 14	15	17	1 & 17	0.44	0.31	5.37
PNB4-20	4 - 14	20	22	1 & 22	0.44	0.31	6.93
PNB2-10	2 - 14	10	12	1 & 12	0.50	0.38	4.12
PNB2-12	2 - 14	12	14	1 & 14	0.50	0.38	4.71

* Oxide Inhibitor is recommended for all aluminum terminations.

* Other sizes and configurations available, please contact factory for assistance.