


Utility - Metering and Streetlighting Products

P2L & PP2L - Two Conductor Solderless Lugs

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Tin plated to provide very low contact resistance and inhibit corrosion
- * Dual rated for copper or aluminum conductors
- * Chamfered wire entry provides ease of installation
- * UL listed to 90C
- * Rated for 600 volts
- * Mounting holes at standard NEMA 1.75" spacing for -2N part numbers

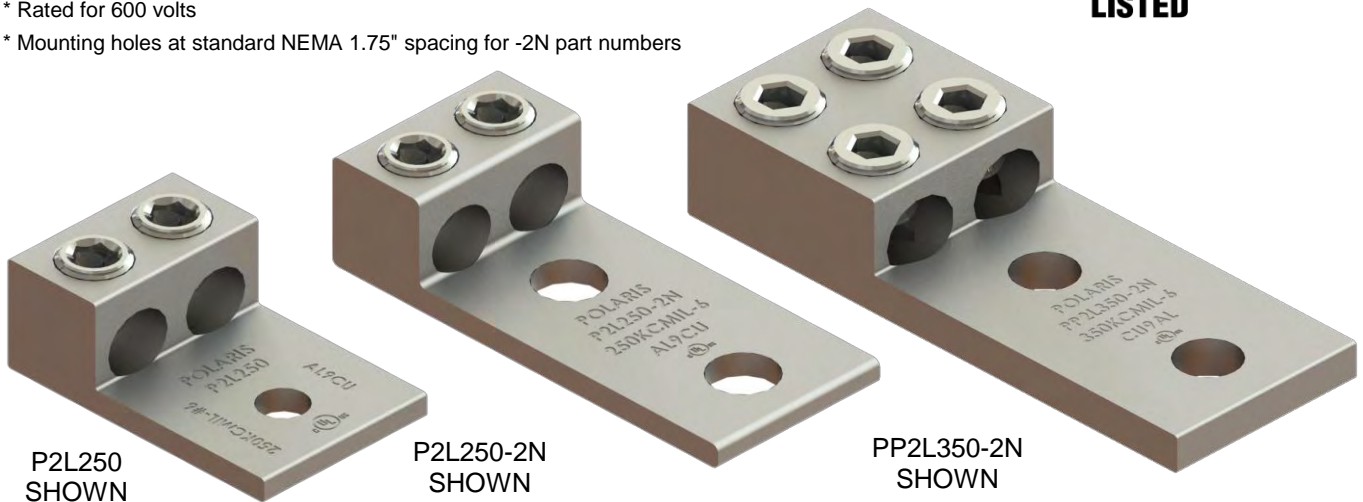

Catalog Number	Wire Range KCMIL/AWG	Stud Size	Dimensions, Inches			Hex Size
			W	H	L	
P2L1/0	1/0 - #14	1/4	1.13	0.78	1.47	5/16
P2L2/0	2/0 - #14	1/4	1.25	0.78	1.47	5/16
P2L250	250 - #6	3/8	1.62	1.02	2.56	5/16
P2L350	350 - #6	3/8	1.92	1.13	2.88	5/16
P2L600	600 - #2	1/2	2.41	1.51	3.18	3/8
P2L800	800 - 300	5/8	2.75	1.69	3.25	1/2
P2L1000	1000 - 350	5/8	3.19	1.88	3.25	9/16
P2L250-2N	250 - #6	1/2	1.62	1.02	3.88	5/16
P2L350-2N	350 - #6	1/2	1.92	1.13	4.25	5/16
P2L600-2N	600 - #2	1/2	2.41	1.51	4.65	3/8
P2L800-2N	800 - 300	1/2	2.75	1.69	4.75	1/2
P2L1000-2N	1000 - 350	1/2	3.19	1.88	4.94	9/16
PP2L250-2N	250 - #6	1/2	1.62	1.02	5.00	5/16
PP2L350-2N	350 - #6	1/2	1.92	1.13	5.25	5/16
PP2L600-2N	600 - #2	1/2	2.41	1.51	5.50	3/8
PP2L800-2N	800 - 300	1/2	2.75	1.69	5.75	1/2
PP2L1000-2N	1000 - 350	1/2	3.19	1.88	6.19	9/16

*Oxide inhibitor is recommended for all aluminum terminations.

Consult factory for additional configurations not listed