


**Utility - Metering and Streetlighting Products**

**P4L & PP4L - Four Conductor Solderless Lugs**

- \* Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- \* Tin plated to provide very low contact resistance and inhibit corrosion
- \* Dual rated for copper or aluminum conductors
- \* Chamfered wire entry provides ease of installation
- \* Mounting holes at standard NEMA 1.75" spacing
- \* Rated for 600 volts
- \* UL listed to 90C

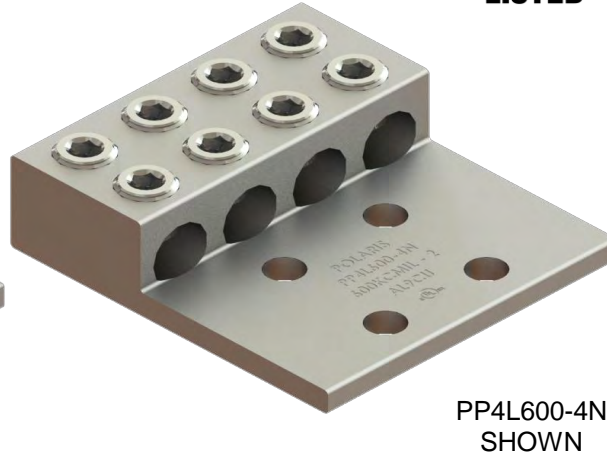

Catalog Number	Wire Range KCMIL/AWG	Stud Size	Dimensions, Inches			Hex Size
			W	H	L	
P4L250-4N	250 - #6	1/2	3.30	1.02	3.88	5/16
P4L350-4N	350 - #6	1/2	3.92	1.13	4.25	5/16
P4L600-4N	600 - #2	1/2	5.00	1.51	4.65	3/8
P4L800-4N	800 - 300	1/2	5.38	1.69	4.75	1/2
P4L1000-4N	1000 - 350	1/2	6.19	1.88	4.94	9/16
PP4L600-4N	600 - #2	1/2	5.00	1.51	5.50	3/8
PP4L800-4N	800 - 300	1/2	5.38	1.69	5.75	1/2
PP4L1000-4N	1000 - 350	1/2	6.19	1.88	6.19	9/16

\*Oxide inhibitor is recommended for all aluminum terminations.

Consult factory for additional configurations not listed