




Utility - Overhead Connectors

PPT-90 - 90-Degree Pin Type Transformer Connector

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 Class A specifications
- * Stud is tin plated copper providing low contact resistance for connection to transformer
- * Range taking design reduces inventory
- * Rated for 600 Volts

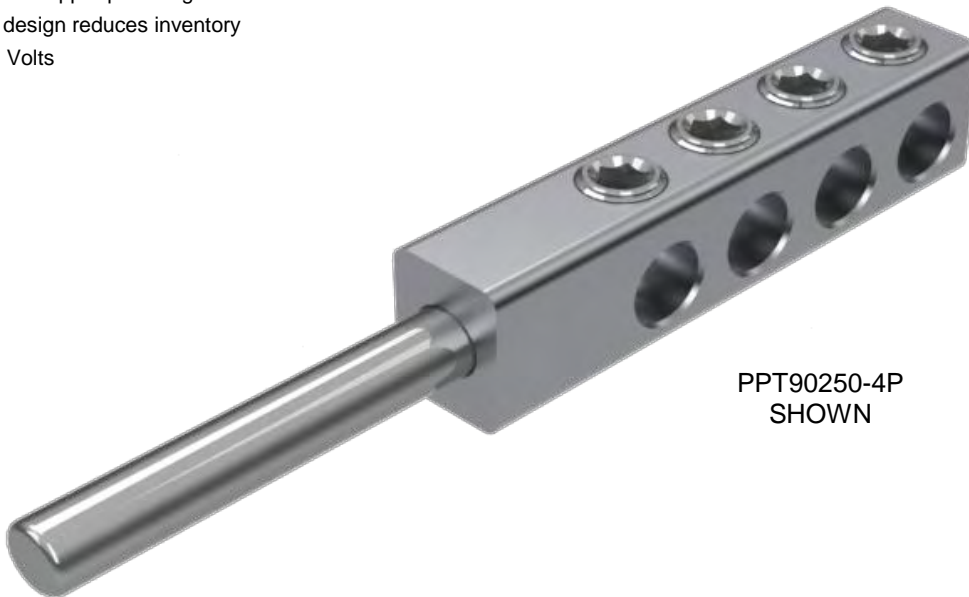

PPT90250-4P
SHOWN

| Catalog Number | Copper Stud Diameter | Copper Stud Length | Number of Ports | Dimensions, Inches | | | Wire Range KCMIL |
|----------------|----------------------|--------------------|-----------------|--------------------|------|------|------------------|
| | | | | L | W | H | |
| PPT90250-2P | 1/2 | 4 | 2 | 2.84 | 0.88 | 1.13 | 250-#10 |
| PPT90250-3P | 1/2 | 4 | 3 | 3.71 | | | |
| PPT90250-4P | 1/2 | 4 | 4 | 4.57 | | | |
| PPT90250-6P | 1/2 | 4 | 6 | 6.29 | | | |
| PPT90250-8P | 1/2 | 4 | 8 | 8.02 | | | |
| PPT90350-212P | 1/2 | 4 | 2 | 3.07 | 0.88 | 1.25 | 350-#10 |
| PPT90350-312P | 1/2 | 4 | 3 | 4.07 | | | |
| PPT90350-412P | 1/2 | 4 | 4 | 5.07 | | | |
| PPT90350-612P | 1/2 | 4 | 6 | 7.07 | | | |
| PPT90350-812P | 1/2 | 4 | 8 | 9.07 | | | |
| PPT90500-2P | 3/4 | 4-1/2 | 2 | 3.71 | 1.13 | 1.63 | 500-#10 |
| PPT90500-3P | 3/4 | 4-1/2 | 3 | 4.77 | | | |
| PPT90500-4P | 3/4 | 4-1/2 | 4 | 5.83 | | | |
| PPT90500-6P | 3/4 | 4-1/2 | 6 | 7.95 | | | |
| PPT90500-8P | 3/4 | 4-1/2 | 8 | 10.07 | | | |

OPTIONS:

- A - Anodized set screws
- T - Tin plated
- SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
- For omission of oxide inhibitor delete suffix "P"

Example:
PPT90250-4P

Inhibitor (must be last)

Consult factory for additional configurations not listed