


Utility - Pedestal Connectors

IPLWB - Submersible Pedestal Connector

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Rubber encapsulated with a nominal thickness of 125 mils
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.1 specifications for a submersible connection.
- * Range taking design reduces inventory
- * Rated for 600 Volts

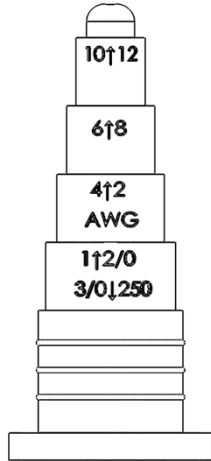

Rocket is used for
Wire Range
IPLWB350 250 - #12
IPLWB600 400 - #12



IPLWB350-4P
SHOWN

Catalog Number	Number of Ports	Dimensions, Inches			Wire Range KCMIL
		W	H	L	
IPLWB350-3P	3	3.56	3.06	4.20	350 - #12
IPLWB350-4P	4	4.75			
IPLWB350-6P	6	7.13			
IPLWB600-3P	3	4.87	3.79	5.43	600 - #12
IPLWB600-4P	4	6.56			
IPLWB600-5P	5	8.25			
IPLWB600-6P	6	9.94			
IPLWB600-8P	8	13.31			
IPLWB600-10P	10	16.68			
IPLWB600-12P	12	20.06			

OPTIONS:

A - Anodized set screws

OC - Orange thread caps

For omission of oxide inhibitor delete suffix "P"

Example:

IPLWB350-4P



Inhibitor (must be last)

Consult factory for additional configurations not listed