





Utility - Pedestal Connectors

PSR - Splicers / Reducers

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Tin plated to provide very low contact resistance and inhibit corrosion
- * Dual rated for copper or aluminum conductors
- * Chamfered wire entry provides ease of installation
- * Wire stop in center prevents dissimilar metals from coming into contact.
- * Rated for 600 volts
- * Rounded edges to facilitate taping

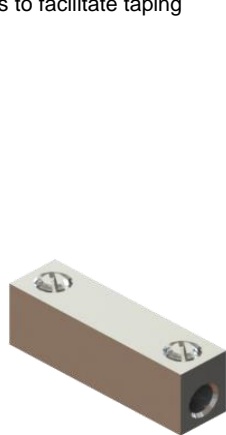

PSR4
SHOWN

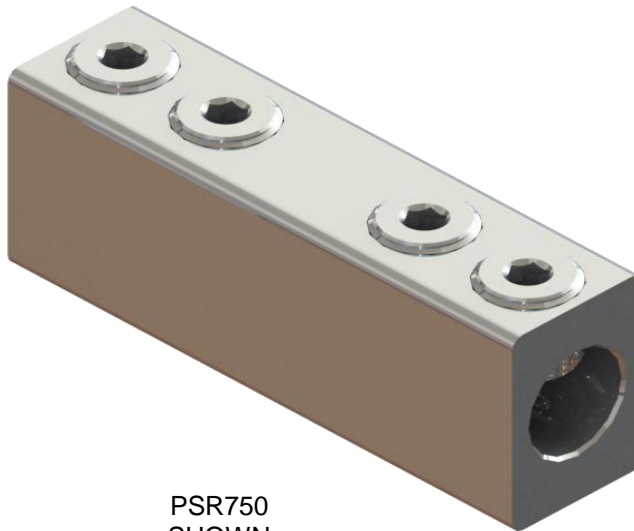

PSR750
SHOWN

Catalog Number	Wire Range KCMIL/AWG	Dimensions, Inches			Hex Size
		W	H	L	
PSR4	#4 - #14	0.50	0.63	1.87	SLOT
PSR1/0	1/0 - #14	0.63	0.88	2.23	3/16
PSR3/0	3/0 - #6	0.69	0.94	2.25	1/4
PSR250	250 - #6	0.88	1.13	2.70	5/16
PSR350	350 - #6	1.00	1.44	3.22	5/16
PSR500	500 - #4	1.13	1.63	3.87	5/16
PSR600	600 - #2	1.25	1.75	4.34	5/16
PSR750	750 - 1/0	1.44	2.00	5.50	5/16
PSR1000	1000 - 250	1.75	2.00	6.00	3/8

*Oxide inhibitor is recommended for all aluminum terminations.

Consult factory for additional configurations not listed