


Utility - Single Phase Transformer Connectors for Underground Use

IPCSMTL - Insulated Secondary Stud Mount Transformer Connectors

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Insulation is clear allowing easier installation with a dielectric strength of 240v per mil
- * Insulated connector has dual ports for left or right hand installation
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 class A specifications
- * Range taking design reduces inventory
- * Rated for 600 Volts

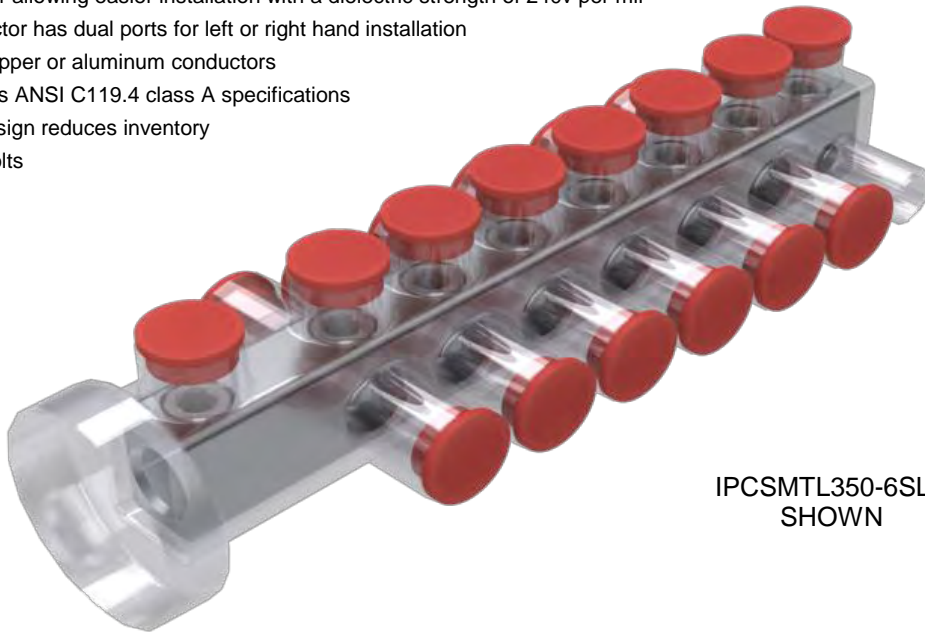

IPCSMTL350-6SLP
SHOWN


Catalog Number		Stud Size	Number of Ports	Dimensions, Inches			Wire Range KCMIL
Slip Fit	Screw-on			L	W	H	
IPCSMTL250-4P	IPCSMTL250-4SP	5/8" - 11	4	5.80	2.38	2.18	250 - #10
IPCSMTL250-6P	IPCSMTL250-6SP	5/8" - 11	6	7.53			
IPCSMTL250-8P	IPCSMTL250-8SP	5/8" - 11	8	9.26			
IPCSMTL350-4P	IPCSMTL350-4SP	5/8" - 11	4	6.68	3.13	2.11	350 - #10
IPCSMTL350-6P	IPCSMTL350-6SP	5/8" - 11	6	8.93			
IPCSMTL350-8P	IPCSMTL350-8SP	5/8" - 11	8	10.31			
IPCSMTL500-4P	IPCSMTL500-4SP	1" - 14	4	7.56	3.13 Slip Fit 2.88 Screw-on	2.63	500 - #10
IPCSMTL500-6P	IPCSMTL500-6SP	1" - 14	6	10.03			
IPCSMTL500-8P	IPCSMTL500-8SP	1" - 14	8	11.56			
IPCSMTL600-4P	IPCSMTL600-4SP	1" - 14	4	7.83	3.13 Slip Fit 2.88 Screw-on	2.63	600 - #10
IPCSMTL600-6P	IPCSMTL600-6SP	1" - 14	6	10.52			
IPCSMTL600-8P	IPCSMTL600-8SP	1" - 14	8	12.62			
IPCSMTL750-4P	IPCSMTL750-4SP	1" - 14	4	8.59	3.39 Slip Fit 3.26 Screw-on	2.95	750 - 1/0
IPCSMTL750-6P	IPCSMTL750-6SP	1" - 14	6	11.44			
IPCSMTL750-8P	IPCSMTL750-8SP	1" - 14	8	13.95			

Also available in Black insulation - remove C from catalog number - ex. IPSMTL350-6SSLP

OPTIONS:

- A - Anodized set screws
 - T - Tin plated
 - SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
 - K - Kit (two insulated and one bare)
- For omission of oxide inhibitor delete suffix "P"

Example:
IPCSMTL350-6SSLP



Consult factory for additional configurations not listed