


Utility - Single Phase Transformer Connectors for Underground Use

PSMTLE - Secondary Multi-Stud Mount Transformer Connectors

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 Class A specifications
- * Range taking design reduces inventory
- * Rated for 600 Volts
- * Patented multi-stud design. Patent # 7,607,955

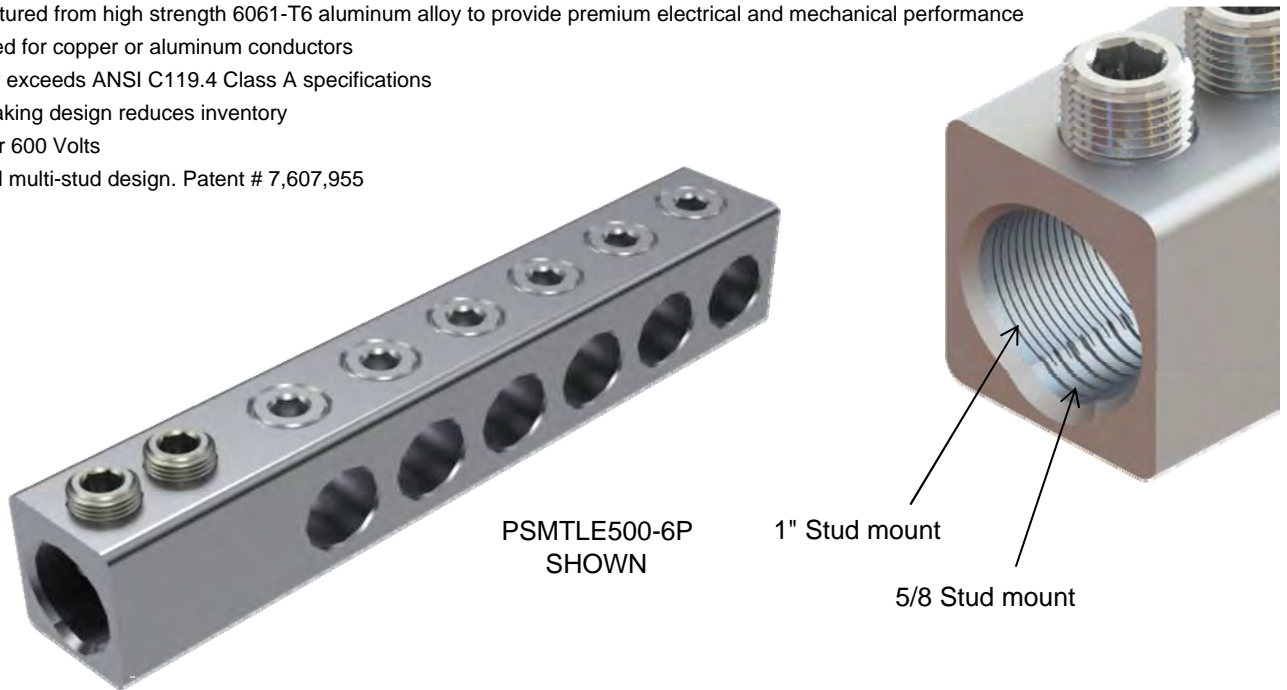

PSMTLE500-6P
SHOWN

1" Stud mount

5/8" Stud mount

Catalog Number	Stud	Size	Number of Ports	Dimensions, Inches			Wire Range KCMIL
				L	W	H	
PSMTLE350-4P	5/8"-11, 1"-14		4	6.13	1.38	1.63	350 - #10
PSMTLE350-6P	5/8"-11, 1"-14		6	8.13			
PSMTLE350-8P	5/8"-11, 1"-14		8	10.13			
PSMTLE500-4P	5/8"-11, 1"-14		4	6.56	1.38	1.63	500 - #10
PSMTLE500-6P	5/8"-11, 1"-14		6	8.81			
PSMTLE500-8P	5/8"-11, 1"-14		8	11.06			
PSMTLE600-4P	5/8"-11, 1"-14		4	7.03	1.38	1.63	600 - #10
PSMTLE600-6P	5/8"-11, 1"-14		6	9.53			
PSMTLE600-8P	5/8"-11, 1"-14		8	12.03			
PSMTLE750-4P	5/8"-11, 1"-14		4	7.64	1.38	1.75	750 - 1/0
PSMTLE750-6P	5/8"-11, 1"-14		6	10.08			
PSMTLE750-8P	5/8"-11, 1"-14		8	12.71			

OPTIONS:

- SC - Lock on cover (PSMTLESC Prefix)
- CC - Slip on cover (PSMTLECC Prefix)
- IPC - Insulated (IPCSMTLE Prefix)
- A - Anodized set screws
- T - Tin plated
- SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
- K - Kit (two insulated and one bare)
- For omission of oxide inhibitor delete suffix "P"

Example:
PSMTLE500-6SLP



Consult factory for additional configurations not listed