




Utility - Single Phase Transformer Connectors for Underground Use

PTLZ-U - Universal Multi-Stud "Z" Transformer Connectors

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 Class A specifications
- * Range taking design reduces inventory
- * Rated for 600 Volts

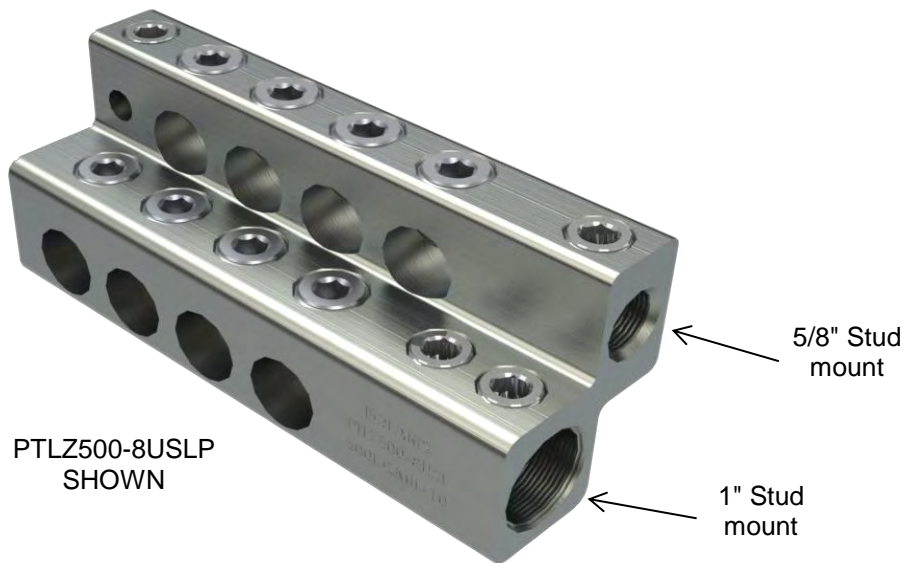

Catalog Number		Stud Size	Number of Ports	Dimensions, Inches			Wire Range KCMIL
Slip Fit	Screw-on			L	W	H	
PTLZ350-4UP	PTLZ350-4USP	5/8"-11, 1"-14	4	4.00	2.25	2.88	350 - #10
PTLZ350-6UP	PTLZ350-6USP	5/8"-11, 1"-14	6	5.00			
PTLZ350-8UP	PTLZ350-8USP	5/8"-11, 1"-14	8	6.00			
PTLZ500-4UP	PTLZ500-4USP	5/8"-11, 1"-14	4	4.43	2.25	2.88	500 - #10
PTLZ500-6UP	PTLZ500-6USP	5/8"-11, 1"-14	6	5.55			
PTLZ500-8UP	PTLZ500-8USP	5/8"-11, 1"-14	8	6.68			
PTLZ600-4UP	PTLZ600-4USP	5/8"-11, 1"-14	4	4.63	2.25	2.88	600 - #10
PTLZ600-6UP	PTLZ600-6USP	5/8"-11, 1"-14	6	5.88			
PTLZ600-8UP	PTLZ600-8USP	5/8"-11, 1"-14	8	7.13			
PTLZ750-4UP	PTLZ750-4USP	5/8"-11, 1"-14	4	4.89	2.50	3.38	750 - 1/0
PTLZ750-6UP	PTLZ750-6USP	5/8"-11, 1"-14	6	6.21			
PTLZ750-8UP	PTLZ750-8USP	5/8"-11, 1"-14	8	7.52			

OPTIONS:

- SC - Lock on cover (PTLZSC Prefix)
- CC - Slip on cover (PTLZCC Prefix)
- IPC - Pre-insulated (IPCTLZ Prefix)
- A - Anodized set screws
- T - Tin plated
- SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
- K - Kit (two insulated and one bare)
- R - Right hand design
- For omission of oxide inhibitor delete suffix "P"

Example:

PTLZ500-6USLP



Consult factory for additional configurations not listed