


Utility - Single Phase Transformer Connectors for Underground Use

PTLZ - "Z" Transformer Connectors


- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 Class A specifications
- * Range taking design reduces inventory
- * Rated for 600 Volts



PTLZ350-61SLP
SHOWN

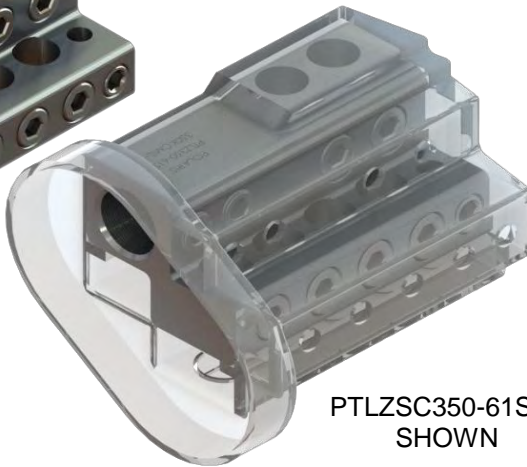

PTLZSC350-61SLP
SHOWN

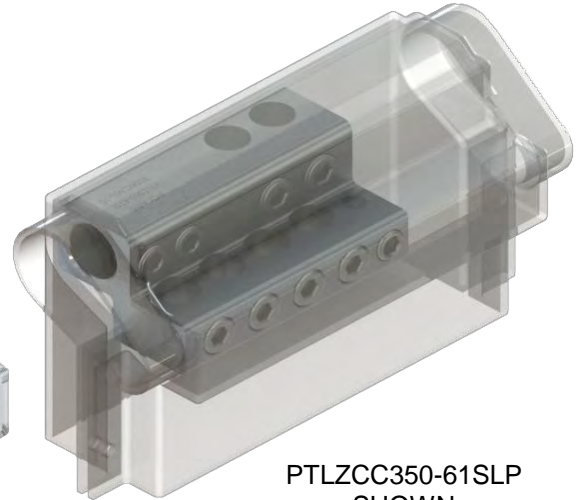

PTLZCC350-61SLP
SHOWN


Catalog Number		Stud Size	Number of Ports	Dimensions, Inches			Wire Range KCMIL
Slip Fit	Screw-on			L	W	H	
PTLZ350-658P	PTLZ350-658SP	5/8"-11	6	4.25	1.75	2.23	350 - #10
PTLZ350-858P	PTLZ350-858SP	5/8"-11	8	5.25			
PTLZ350-61P	PTLZ350-61SP	1"-14	6	4.31	2.25	2.88	
PTLZ350-81P	PTLZ350-81SP	1"-14	8	5.31			
PTLZ500-61P	PTLZ500-61SP	1"-14	6	5.10	2.25	2.88	500 - #10
PTLZ500-81P	PTLZ500-81SP	1"-14	8	6.23			
PTLZ600-61P	PTLZ600-61SP	1"-14	6	5.13	2.25	2.88	600 - #6
PTLZ600-81P	PTLZ600-81SP	1"-14	8	6.38			
PTLZ750-61P	PTLZ750-61SP	1"-14	6	5.38	2.50	3.38	750 - 1/0
PTLZ750-81P	PTLZ750-81SP	1"-14	8	6.69			

OPTIONS:

- SC - Lock On Cover (PTLZSC Prefix)
- CC - Slip on Cover (PTLZCC Prefix)
- A - Anodized set screws
- T - Tin plated
- SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
- K - Kit (two insulated and one bare)
- R - Right hand design
- For omission of oxide inhibitor delete suffix "P"

Example:

PTLZ350-658SSLP



Consult factory for additional configurations not listed