




Utility - Three Phase Transformer Connectors for Underground Use


PPX & PPOX - Flat Pad Extensions

* Manufactured from high strength 6061-T6 aluminum alloy or copper as marked below

* 9/16" Mounting holes at standard NEMA 1.75" spacing

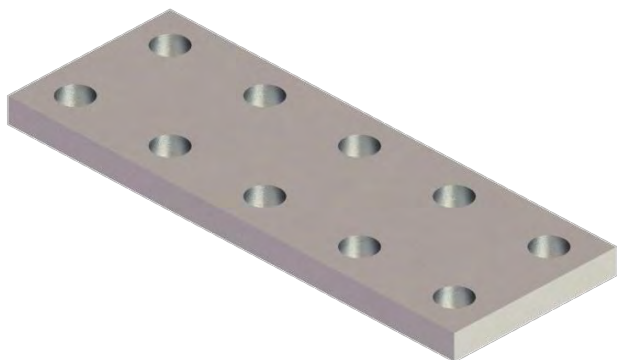

PPX10
SHOWN

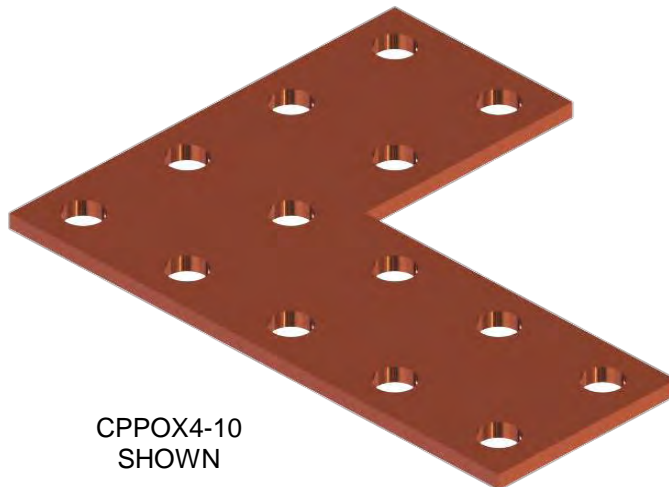


CPPOX4-10
SHOWN

Catalog Number	Material Type	Dimensions, Inches		
		L	W	Thickness
PPX6	Aluminum	4.75	3.00	0.50
PPX8	Aluminum	6.50	3.00	0.50
PPX10	Aluminum	8.25	3.00	0.50
PPX12	Aluminum	10.00	3.00	0.75
PPOX4-6	Aluminum	4.75	6.50	0.50
PPOX4-8	Aluminum	6.50	6.50	0.50
PPOX4-10	Aluminum	8.25	6.50	0.75
PPOX4-12	Aluminum	10.00	6.50	0.75
CPPX6	Copper	4.75	3.00	0.25
CPPX8	Copper	6.50	3.00	0.25
CPPX10	Copper	8.25	3.00	0.25
CPPX12	Copper	10.00	3.00	0.50
CPPOX4-6	Copper	4.75	6.50	0.25
CPPOX4-8	Copper	6.50	6.50	0.25
CPPOX4-10	Copper	8.25	6.50	0.25
CPPOX4-12	Copper	10.00	6.50	0.50

OPTIONS:
T - Tin Plated

Example:
CPPOX4-10-T



Consult factory for additional configurations not listed