


## Utility - Three Phase Transformer Connectors for Underground Use

### PTLIH - Heavy Duty Transformer Lugs (Lay-In Connector)

- \* Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- \* Dual rated for copper or aluminum conductors
- \* Meets or exceeds ANSI C119.4 class A specifications
- \* Range taking design reduces inventory
- \* Rated for 600 volts
- \* Mounting holes at standard NEMA 1.75" spacing

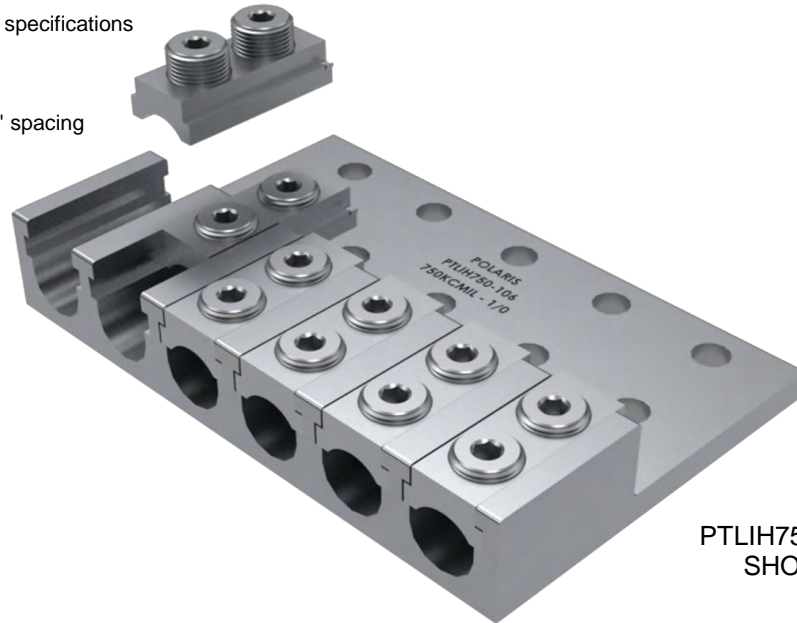

PTLIH750-106P  
SHOWN

Catalog Number	Mounting Holes	Number of Ports	Dimensions, Inches			Wire Range KCMIL
			W	H	L	
PTLIH600-P	2	1	1.68	1.69	5.50	600 - #2
PTLIH600-42P	4	2	3.15			
PTLIH600-63P	6	3	4.63			
PTLIH600-84P	8	4	6.38			
PTLIH600-106P	10	6	8.75			
PTLIH600-148P	14	8	11.63			
PTLIH750-P	2	1	1.75	1.81	6.19	750 - 1/0
PTLIH750-42P	4	2	3.25			
PTLIH750-63P	6	3	4.75			
PTLIH750-84P	8	4	6.25			
PTLIH750-106P	10	6	9.25			
PTLIH750-148P	14	8	12.25			
PTLIH1000-P	2	1	2.00	1.81	6.19	1000 - 1/0
PTLIH1000-42P	4	2	3.63			
PTLIH1000-63P	6	3	5.31			
PTLIH1000-84P	8	4	7.00			
PTLIH1000-126P	12	6	10.38			
PTLIH1000-168P	16	8	13.75			

**OPTIONS:**

A - Anodized set screws

T - Tin plated

For omission of oxide inhibitor delete suffix "P"

Covers available

Example:

**PTLIH750-106AP**

Anodized Screws

Inhibitor (must be last)

Consult factory for additional configurations not listed