


**Utility - Three Phase Transformer Connectors for Underground Use**

**PTLIHS - Heavy Duty Transformer Lugs (Stacked Lay-In Connector)**

- \* Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- \* Dual rated for copper or aluminum conductors
- \* Meets or exceeds ANSI C119.4 class A specifications
- \* Range taking design reduces inventory
- \* Rated for 600 volts
- \* Mounting holes at standard NEMA 1.75" spacing

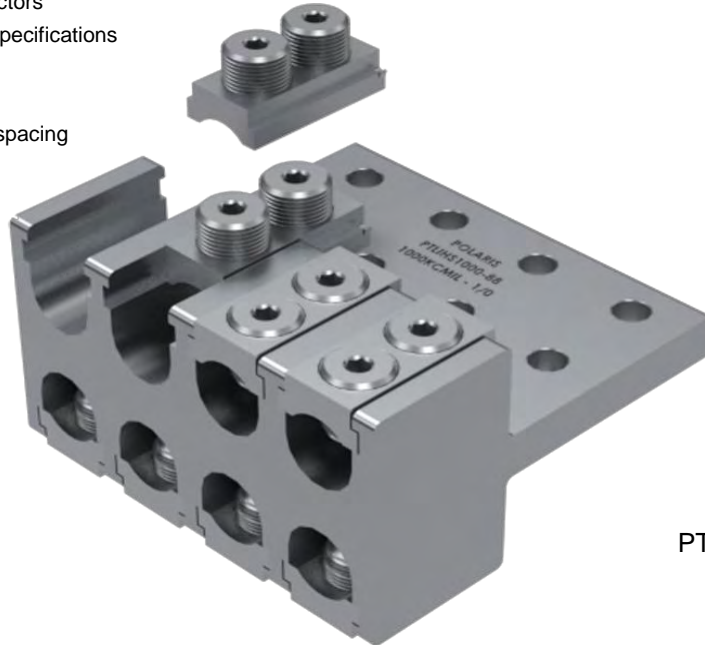

PTLIHS1000-88P  
SHOWN

| Catalog Number   | Mounting Holes | Number of Ports | Dimensions, Inches |      |      | Wire Range KCMIL |
|------------------|----------------|-----------------|--------------------|------|------|------------------|
|                  |                |                 | W                  | H    | L    |                  |
| PTLIHS750-22P    | 2              | 2               | 1.75               | 4.00 | 6.75 | 750 - 1/0        |
| PTLIHS750-44P    | 4              | 4               | 3.25               |      |      |                  |
| PTLIHS750-66P    | 6              | 6               | 4.75               |      |      |                  |
| PTLIHS750-88P    | 8              | 8               | 6.25               |      |      |                  |
| PTLIHS750-1010P  | 10             | 10              | 8.00               |      |      |                  |
| PTLIHS750-1212P  | 12             | 12              | 9.75               |      |      |                  |
| PTLIHS750-1616P  | 16             | 16              | 13.50              | 4.00 | 6.75 | 1000 - 1/0       |
| PTLIHS1000-22P   | 2              | 2               | 2.00               |      |      |                  |
| PTLIHS1000-44P   | 4              | 4               | 3.63               |      |      |                  |
| PTLIHS1000-66P   | 6              | 6               | 5.31               |      |      |                  |
| PTLIHS1000-88P   | 8              | 8               | 7.00               |      |      |                  |
| PTLIHS1000-1010P | 10             | 10              | 8.69               |      |      |                  |
| PTLIHS1000-1212P | 12             | 12              | 10.38              | 4.00 | 6.75 | 1000 - 1/0       |
| PTLIHS1000-1616P | 16             | 16              | 13.75              |      |      |                  |

**OPTIONS:**

A - Anodized set screws

T - Tin plated

For omission of oxide inhibitor delete suffix "P"

Additional support mounting holes also available - Consult Factory

Covers available

Example:

**PTLIHS1000-88AP**

Anodized Screws

Inhibitor (must be last)

Consult factory for additional configurations not listed