



**Utility - Three Phase Transformer Connectors for Underground Use**

**PTLK (Space Saving Connector for 3-Phase Transformers)**

- \* Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- \* Dual rated for copper or aluminum conductors
- \* Range taking design reduces inventory
- \* Rated for 600 volts
- \* Mounting holes at standard NEMA 1.75" spacing



PTLK750-68P  
SHOWN

Catalog Number	Mounting Holes	Number of Ports	Dimensions, Inches			Wire Range KCMIL
			W	H	L	
PTLK750-22P	2	2	1.50	3.00	5.75	750 - 1/0
PTLK750-44P	4	4	3.00			
PTLK750-68P	6	8	5.38			
PTLK750-810P	8	10	6.69			
PTLK750-1012P	10	12	8.25			


**OPTIONS:**

A - Anodized set screws

T - Tin plated

For omission of oxide inhibitor delete suffix "P"

Covers available

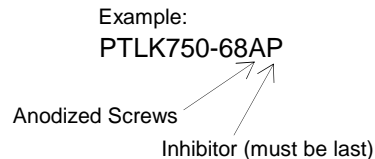

Consult factory for additional configurations not listed