


Utility - Three Phase Transformer Connectors for Underground Use

PTLM - Medium Duty Transformer Lugs

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Range taking design reduces inventory
- * Rated for 600 volts
- * Mounting holes at standard NEMA 1.75" spacing

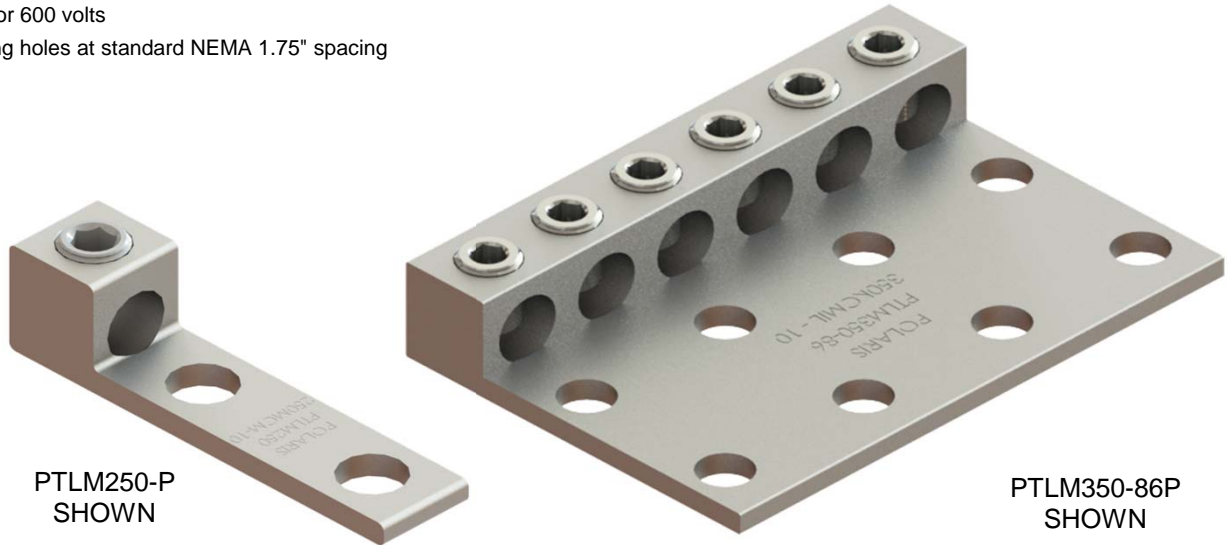

Catalog Number	Mounting Holes	Number of Ports	Dimensions, Inches			Wire Range KCMIL
			W	H	L	
PTLM250-P	2	1	0.88	1.02	3.88	250 - #10
PTLM250-42P	4	2	2.88			
PTLM250-43P	4	3	2.88			
PTLM250-64P	6	4	4.63			
PTLM350-P	2	1	1.00	1.13	4.25	350 - #10
PTLM350-42P	4	2	2.88			
PTLM350-43P	4	3	3.12			
PTLM350-64P	6	4	4.63			
PTLM350-86P	8	6	6.25	1.56	4.31	500 - #10
PTLM500-P	2	1	1.25			
PTLM500-42P	4	2	2.88			
PTLM500-43P	4	3	3.50			
PTLM500-64P	6	4	4.63			
PTLM500-86P	8	6	6.88			
PTLM500-108P	10	8	9.13			

OPTIONS:

A - Anodized set screws

T - Tin plated

For omission of oxide inhibitor delete suffix "P"

Covers available

Example:
PTLM500-64AP
 Anodized Screws →
 Inhibitor (must be last) →

Consult factory for additional configurations not listed