


Utility - Metering and Streetlighting Products

P3L & PP3L - Three Conductor Solderless Lugs

- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Tin plated to provide very low contact resistance and inhibit corrosion
- * Dual rated for copper or aluminum conductors
- * Chamfered wire entry provides ease of installation
- * Mounting holes at standard NEMA 1.75" spacing
- * Rated for 600 volts
- * UL listed to 90C

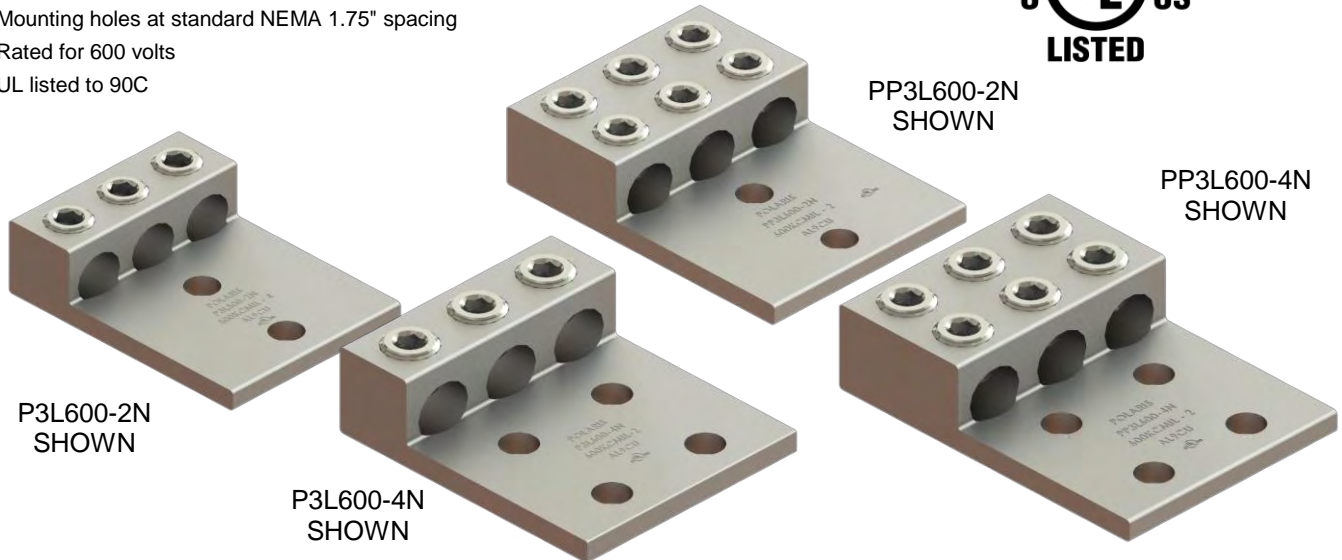

Catalog Number	Wire Range KCMIL/AWG	Stud Size	Dimensions, Inches			Hex Size
			W	H	L	
P3L250-2N	250 - #6	1/2	2.50	1.02	3.88	5/16
P3L350-2N	350 - #6	1/2	2.92	1.13	4.25	5/16
P3L600-2N	600 - #2	1/2	3.93	1.51	4.65	3/8
P3L800-2N	800 - 300	1/2	4.06	1.69	4.75	1/2
P3L1000-2N	1000 - 350	1/2	4.69	1.88	4.94	9/16
PP3L600-2N	600 - #2	1/2	3.93	1.51	5.50	3/8
PP3L800-2N	800 - 300	1/2	4.06	1.69	5.75	1/2
PP3L1000-2N	1000 - 350	1/2	4.69	1.88	6.19	9/16
P3L250-4N	250 - #6	1/2	2.50	1.02	3.88	5/16
P3L350-4N	350 - #6	1/2	2.92	1.13	4.25	5/16
P3L600-4N	600 - #2	1/2	3.93	1.51	4.65	3/8
P3L800-4N	800 - 300	1/2	4.06	1.69	4.75	1/2
P3L1000-4N	1000 - 350	1/2	4.69	1.88	4.94	9/16
PP3L600-4N	600 - #2	1/2	3.93	1.51	5.50	3/8
PP3L800-4N	800 - 300	1/2	4.06	1.69	5.75	1/2
PP3L1000-4N	1000 - 350	1/2	4.69	1.88	6.19	9/16

*Oxide inhibitor is recommended for all aluminum terminations.

Consult factory for additional configurations not listed